LOAN DOCUMENT

	SHEET	PHOTOGRAPH THIS			
	0			æ	
,	INVENTORY		LEVEL	N NUMBE	
_	Hion Test Rpt	In-Situ Rospica DOCUMENT IDENTIFICATION TOCH 92	Sioventing	DTIC ACCESSION NUMBER	
]	c Release	DISTRIBUTION STATE Approved for Public Distribution Unit			
-	DN STATEMENT	DISTRIBUTIO			
				000	CCPSSION FOR NTIS GRAM DTIC TRAC UNANNOUNCED
1					USTIFICATION
1					
					Y ISTRIBUTION/
			SPECIAL	Y AND/OR SPE	VAILABILITY CODES DISTRIBUTION AVAILABILE
	DATE ACCESSIONED	•			9-1
4					```
4			P	N STAMP	DISTRIBUTIO
	DATE RETURNED				
		009	0 QUALATY 19101Y 0 1 0 1 1 6	DIIC.	
			# \ \ \	_ ~ ~	
R	REGISTERED OR CERTIFIED NUMBER		TE RECEIVED IN DTIC	DATE F	
	DAC	IIS SHEET AND RETURN TO DTIC-FD	PHOTOGRAPH T		,
INTIL	PREVIOUS EDITIONS MAY BE USED UN STOCK IS EXHAUSTED.	DOCUMENT PROCESSING SHEET		7.20	TIC POPM 70A
	PREVIOUS EDITIONS MAY BE USED	009	010116 TE RECEIVED IN DTIC	200	**

October 7, 1992

Mr. Jim Williams
Department of the Air Force
Center for Environmental Excellence (AFCEE)
Environmental Restoration Division (ESR)
Building 624 West
Brooks AFB, Texas 78235-5000

Subject:

F33615-90-4014, Order 04, Mod. 04

Bioventing In-Situ Respiration Test Report

7th Street BX Service Station

Dear Mr. Williams:

Two copies of the report presenting the results of the 1st Quarter in-situ respiration test for the bioventing system at the 7th Street BX Service Station are attached. As requested, a copy of this report is also being sent to Ms. Patricia Williamson.

Sincerely,

ENGINEERING-SCIENCE, INC.

Ola A. Awosika, P.G.

Project Manager

OAA:tdr Attachment

cc: Patricia Williamson (Eglin AFB)

Rodney Hamel (AFCEE)

AT510\929J137

AQM01-04-0630

	DEFENSE TECHNICAL INFO REQUEST FOR SCIENTIFIC AND		
7	AFCEE Collection		The state of the s
	Basis 18477237777979 1-5-5		
	Report Availability (Please check one box)	29. Mumber of Copies Forwarded	25. Forwarding Date
	This report is available. Complete sections 2a - 2f. This report is not available. Complete section 3.	1 - 1	0.1/2001
20	. Distribution Statement (Please check ONE DOX)	1 each	July 2010
	D Directive 5230.24, "Distribution Statements on Technical Documents scribed briefly below. Technical documents MUST be assigned a distri		n distribution statements, as
M			enlimitad
	DISTRIBUTION STATEMENT B: Distribution authorized		
	DISTRIBUTION STATEMENT C: Distribution authorized contractors.		
Ci	DISTRIBUTION STATEMENT D: Distribution authorized DoD centractors only.	to U.S. Department of	f Defense (DoO) and U.S
IJ	DISTRIBUTION STATEMENT E: Distribution subsodies? components only.	to U.S. Department of	f Dalanse (DoU)
	DISTRIBUTION STATEMENT F: Further dissemination indicated below or by higher authority.	only as directed by the	controlling DoD wiles
	DISTRIBUTION STATEMENT X: Distribution authorized individuals or enterprises eligible to obtain export-control Directive 5230.25, Withholding of Unclassified Technical	led technical data in a	cordance with DoD
2d.	Reason For the Above Distribution Statement (in accor	danco with DoD Directive 5	230.24)
2e,	Controlling Office	27. Date of Distri Determination	bution Statement
ŧ	HQ AFLEE	15 Nov	2000
3.	This report is NOT forwarded for the following reasons	. (Please thack appropris	nte box)
	It was previously forwarded to DTIC on(de		1 ds
	It will be published at a later date. Enter approximate date	e if known.	77#***********************************
	in accordance with the provisions of DoD Directive 3200, because:	12, the requested dom	ment is not supplied
	Plantique des recenta (que sel la del del 2011). Al 2) interes e establishe de reconstante en constante en co	ELDIFECEE I TEXA PROPERTIES AND PROMOTE TOMBRE, ATTOCKET IN COLUMN	The state of the s
genes.		energene (n. 1941). A ser en	and for meaning the properties of the first and properties of the contract of the first and the first and the contract of the first and the fi
TITI I A	at or Type Name Signal		No.
	Add the second of the second o	AC BENTLEM M	
The stant	0-53/2-14/3/	1	01-04-0630

W 154 8 82

RESPIRATION TEST REPORT 1ST QUARTER OF OPERATION, MAINTENANCE AND MONITORING OF THE BIOVENTING SYSTEM AT THE 7TH STREET BX SERVICE STATION EGLIN AFB

INTRODUCTION

On September 2 and 3, 1992 an in-situ respiration test was performed at the 7th Street BX Service Station. The purpose of the respiration test is to ensure that nutrients, moisture or oxygen are not limiting biodegradation and to confirm the presence of biological activity.

Operation of the bioventing system at the 7th Street BX Service Station began in May 1992. Occasionally operation of the system has been interrupted because of power failures and recently because of concern for potential off gas emission at the site. The latter concern prompted down-sizing of the 2.5 horsepower blower used since startup of the system to a 1.0 horsepower (hp) unit.

IN-SITU RESPIRATION TEST

The bioventing system had been operating continuously with a 1 horse power (hp) blower for about one week prior to the date of this test to ensure adequate supply of oxygen into the soil at the site. Vacuum levels at the filter inlet, filter outlet, and blower outlet were also monitored to determine blower performance and flow rate prior to the respiration test. With the dilution valve open, vacuum at the air filter inlet was 4" H_2O , head loss through the filter was 12" H_2O , and pressure at the blower exhaust was 16" H_2O . The total pressure across the blower was 36" H_2O indicating the total flow into the injection trenches was approximately 50 CFM. The temperature at the filter inlet was 100°F and 110°F at the blower discharge.

A leak test was performed at each of the vapor monitoring points (VMPs) to find out if air leakage could occur at the VMPs during the respiration test. A leak was detected at the valve for VMP-1S and could not be corrected prior to the test. Therefore, the data for this well could not be used. The equipment used during the respiration test included an oxygen/carbon dioxide (O₂/CO₂) meter, a total hydrocarbon meter and a 1 scfm pump. A Gas Tech Model 3552OX O₂/CO₂ meter was used in measuring concentration of gases at each point of interest (i.e., vapor monitoring points). This equipment can measure oxygen levels which can be read from 0 to 25% and carbon dioxide levels which can be read from 0 to 25%. A

1

AT510\929J137

GasTech TraceTechor[™] hydrocarbon analyzer was used to measure total hydrocarbon concentrations with range settings of 150 ppm, 1,000 ppm, and 10,000 ppm. Both of these equipment were calibrated daily prior to use. The O_2/CO_2 meter was calibrated using a 0% and 5% standard for O_2 and a 5% standard for O_2 . The hydrocarbon analyzer was calibrated with hexane at 4,400 ppm. The O_2/CO_2 instrument was checked against atmospheric concentration prior to taking field measurements.

Initial measurements taken on arrival at the site indicated oxygen levels from 5.4% and 6.5% at the deep vapor monitoring points VMP-1D and VMP-2D, respectively and at 0.5% and 10% at the shallow vapor monitoring points VMP-1S and VMP-2S, respectively. Notably, up to 20% oxygen had been measured at the deep VMPs during use of the 2.5 hp blower over the first two months of system operation. This apparent decrease in oxygen levels at the vapor monitoring points can be attributed to the reduced air flow from the new 1 hp blower currently being used.

TEST RESULTS

At exactly 1330 hours on September 2, 1991 the system was shutdown to begin the respiration test. The first set of readings were taken 1 hour after shutdown. The readings indicated oxygen levels dropped more than 2% at the VMPs. (See attached data tables.) In particular oxygen level measurement was 0% at VMP-2S. A second set of readings, taken 2 hours after shutdown indicate less than 1% drop in oxygen levels. Approximately 4 hours into the test, the following oxygen levels were measured: 0% at VMP-2D and approximately 2% at VMP-1D. About 30 hours into the respiration test oxygen levels in VMP-1D was at 0.2%. The respiratory test data is presented in the attached data sheets. Data collected are also presented graphically in attached figures. Carbon dioxide levels increased up to about 11% at both deep VMPs and at VMP-2S at the end of the respiration test and appeared to have complemented oxygen readings throughout the test. Total hydrocarbon levels measured during the respiration test are also included in the attached data sheets.

Oxygen utilization rates were calculated as the percent change in O_2 over time (slope of O_2 vs. time). The slope of the curve from data collected was based on the entire length of time of the test data or to a point where O_2 level practically was non-existent (zero). Using data obtained from VMP-1D and VMP-2D, rates of oxygen utilization varied from 0.28 to 1.35% oxygen per hour. The rate of fuel biodegradation was estimated using the equation:

$$K_b = K_o A D_o C/100$$

Where:

 $K_h = Fuel biodegradation rate (mg/kg/day)$

 $K_0 = Oxygen utilization rate (% per day) (6.72 to 32.4)$

A = Volume of air/kg of soil (L/kg) (estimated at 0.21 L/kg soil)

 $D_0 = Density of oxygen (mg/L) (1330 mg/L)$

C = Mass ratio of hydrocarbon to oxygen for mineralization (1:3.5)

Solving:

 $K_b = 5.36 \text{ to } 25.85 \text{ mg/kg/day}$

In May 1992, at startup of operation of the system, the fuel biodegradation rate was estimated at 2.9 to 5.3 mg/kg/day, therefore, current fuel biodegradation rates are indicative of significant increase in bioactivity since start up of the bioventing system at the 7th Street BX Service Station and suggest that a more active bacterial population has been reestablished. In addition, this increase could also be attributed to increase in air temperature from 99°F at start up to 110°F currently at the blower discharge. These results also suggest the 1 hp blower is providing adequate oxygen supply to support operation of the bioventing system. A second respiration test is scheduled for late November 1992 and will be used to confirm these results and to verify long term respiration rates at the site.

3

IN-SITU RESPIRATION TEST - 1ST QUARTER DETERMINATION OF FUEL BIODEGRADATION RATE - $\ensuremath{K_b}$

 $K_b = K_o A D_o R \times 1/100 \times 1440 \min/day$

(1)

or $K_b = K_o A D_o C/100$

(2)

where:

K_b = Fuel Biodegradation Rate (mg/kg/day)

Ko = (Oxygen Utilization Rate) % per day

A = 0.21 liter/kilograms of soil (L/kg)

Do = 1330 milligrams/liter (mg/L)

C = 1:3.5

Using Eq. (2)


For VMP-1D $K_o = 6.72\%$ per day

 $K_b = 6.72 \%/day \times 0.21 L/kg \times 1330 mg/L \times 1/3.5 \times 0.01 = 5.36 (mg/kg/day)$

For VMP-2S Data is not suitable for Kb determination

for VMP-2D $K_o = 32.4\%$ per day

 $K_b = 32.4 \%/day \times 0.21 L/kg \times 1330 mg/L \times 1/3.5 \times 0.01 = 25.8S (mg/kg/day)$

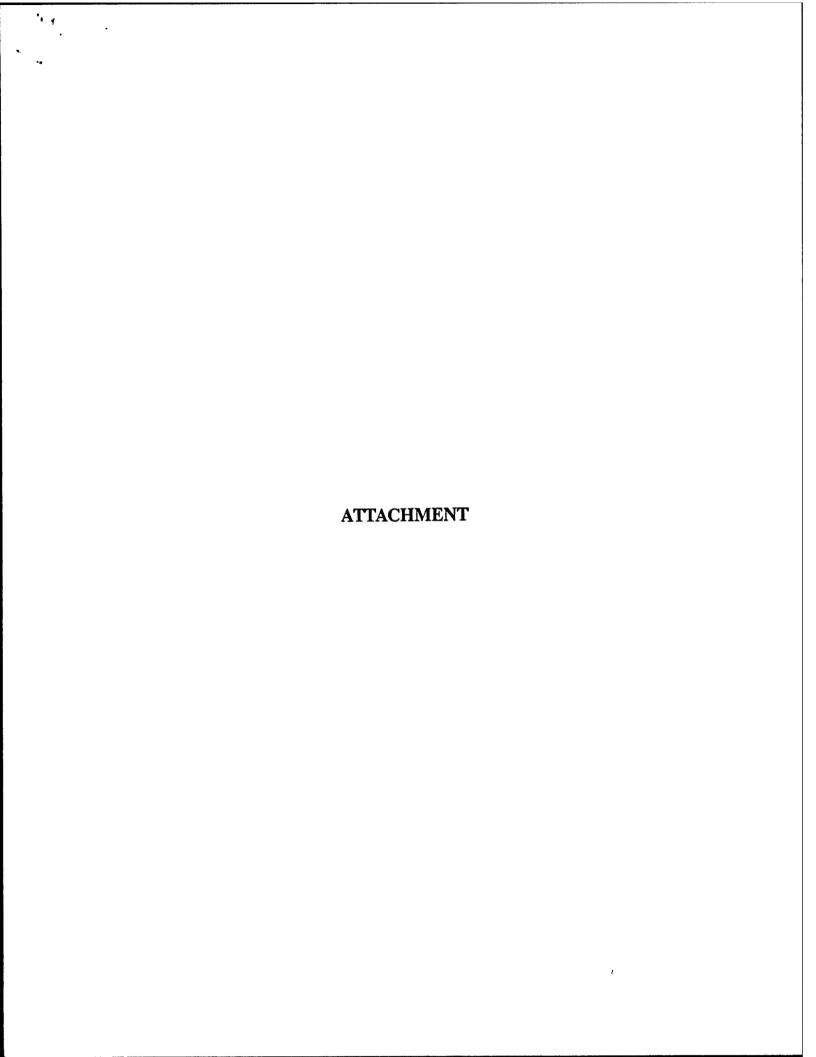


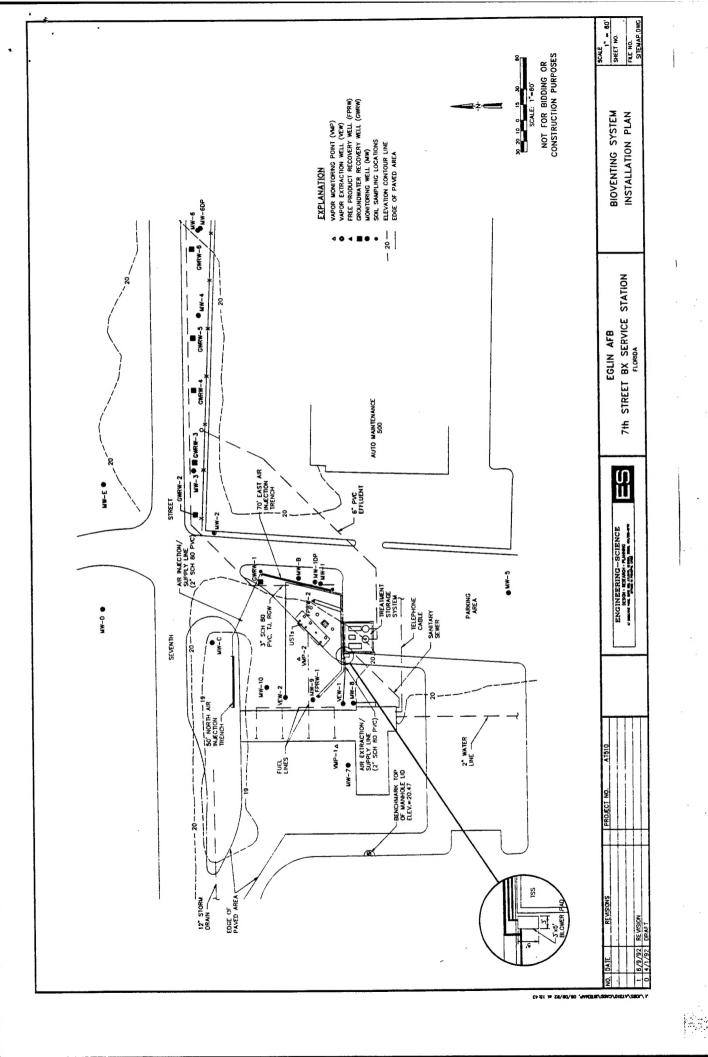



TABLE 1
BIOVENTING IN-SITU RESPIRATION TEST RESULTS
7TH STREET BX SERVICE STATION
EGLIN AFB

Elapsed Total Total Total Total Time CO2 O2 Hydrocarbons CO2 O2 Hydrocarbons CO2 O2 Hydrocarbons (min) (%) (%) (ppm) (%) (%) (%) Hydrocarbons (min) (%) (%) (ppm) (%) (%) Hydrocarbons (min) (%) (%) (%) (%) (%) Hydrocarbons (%) <th></th> <th></th> <th>VMP-1D</th> <th></th> <th></th> <th>VMP-2S</th> <th></th> <th></th> <th>VMP-2D</th> <th></th>			VMP-1D			VMP-2S			VMP-2D	
CO2 O2 Hydrocarbons CO2 O2 Hydrocarbons CO2 O2	Elapsed			Total			Total			Total
(%) (%) (ppm) (%) (ppm) (%) (%) (%) 6.5 8.0 400 6.9 0.5 10000 3.4 5.4 8.6 3.0 310 10.3 0.0 8500 10.2 0.3 9.5 2.2 310 10.5 0.0 8500 10.4 0.4 10.9 2.2 300 11.9 0.0 8500 11.4 0.4 10.4 2.0 300 11.4 0.8 8600 11.4 0.1 9.9 1.9 300 11.4 0.8 8600 11.2 1.0 12.0 1.0 300 10.6 0.1 9200 11.5 0.0 11.4 0.5 210 12.0 0.0 9100 11.5 0.0 11.8 0.3 300 12.0 0.0 9100 11.5 0.0 12.0 0.2* 320 12.0 0.0 9100	Time	C02	07	Hydrocarbons	C02	05	Hydrocarbons	C02	05	Hydrocarbons
6.5 8.0 400 6.9 0.5 10000 3.4 5.4 8.6 3.0 310 10.3 0* 10000 9.7 0.5 9.5 2.3 275 10.5 0.0 8500 10.2 0.3 9.6 2.2 310 10.5 0.0 8500 10.4 0* 10.9 2.2 300 11.9 0.0 8500 11.4 0.* 10.4 2.0 300 11.4 0.8 8600 11.2 1.0 9.9 1.9 300 10.6 0.1 9200 11.2 1.0 11.4 0.5 210 12.0 1.0 9100 11.5 0.0 11.8 0.3 300 12.0 9100 9100 11.5 0.0 12.0 0.2* 320 12.0 9100 9100 11.5 0.0	(min)	(%)	(%)	(mdd)	(%)	(%)	(mdd)	(%)	(%)	(mdd)
8.6 3.0 310 10.3 0* 10000 9.7 0.5 9.5 2.3 275 10.5 0.0 8500 10.2 0.3 9.6 2.2 310 10.5 0.0 8500 10.4 0* 10.9 2.2 300 11.9 0.0 8500 11.4 0.1 10.4 2.0 300 11.4 0.8 8600 11.2 1.0 9.9 1.9 300 10.6 0.1 9200 10.3 0.2 11.4 0.5 210 12.0 1.0 9000 11.5 0.0 11.8 0.3 300 12.0 0.0 9100 11.5 0.0 12.0 0.2* 320 12.0 0.0 9100 11.5 0.0	0	6.5	8.0	400	6.9	0.5	10000	3.4	5.4	10000
9.5 2.3 275 10.5 0.0 8500 10.2 0.3 9.6 2.2 310 10.5 0.0 8600 10.4 0* 10.9 2.2 300 11.9 0.0 8500 11.4 0.1 10.4 2.0 300 11.4 0.8 8600 11.2 1.0 9.9 1.9 300 10.6 0.1 9200 11.2 1.0 12.0 1.0 200 12.0 1.0 9000 11.5 0.0 11.4 0.5 210 12.0 0.0 9100 11.5 0.0 11.8 0.3 300 12.0 0.0 9100 11.5 0.0 12.0 0.2* 320 12.0 0.0 9100 11.5 0.0	09	9.8	3.0	310	10.3	*0	10000	6.7	0.5	10000
9,6 2.2 310 10.5 0.0 8600 10.4 0* 10,9 2.2 300 11.9 0.0 8500 11.4 0.1 10,4 2.0 300 11.4 0.8 8600 11.2 1.0 9,9 1.9 300 10.6 0.1 9200 10.3 0.2 12.0 1.0 200 12.0 1.0 9000 11.5 0.0 11.4 0.5 210 12.0 0.0 9100 11.5 0.0 11.8 0.3 300 12.0 9100 11.5 0.0 12.0 0.2* 320 12.0 0.0 9100 11.5 0.0	120	9.5	2.3	275	10.5	0.0	8200	10.2	0.3	0096
10.9 2.2 300 11.9 0.0 8500 11.4 0.1 10.4 2.0 300 11.4 0.8 8600 11.2 1.0 9.9 1.9 300 10.6 0.1 9200 10.3 0.2 12.0 1.0 200 12.0 1.0 9000 11.5 0.0 11.4 0.5 210 12.0 0.0 9100 11.5 0.0 11.8 0.3 320 320 12.0 0.0 9100 11.5 0.0	240	9.6	2.2	310	10.5	0.0	8600	10.4	*0	9200
10.4 2.0 300 11.4 0.8 8600 11.2 1.0 9.9 1.9 300 10.6 0.1 9200 10.3 0.2 12.0 1.0 200 12.0 1.0 9000 11.5 0.0 11.4 0.5 210 12.0 0.0 9100 11.5 0.0 11.8 0.3 300 320 12.0 0.0 9100 12.0	540	10.9	2.2	300	11.9	0.0	8200	11.4	0.1	8200
9.9 1.9 300 10.6 0.1 9200 10.3 0.2 12.0 1.0 200 12.0 1.0 9000 11.5 0.0 11.4 0.5 210 12.0 0.0 9100 11.5 0.0 11.8 0.3 300 320 320 320 320 320	840	10.4	2.0	300	11.4	8.0	8600	11.2	1.0	8700
12.0 1.0 200 12.0 1.0 9000 11.5 0.0 11.4 0.5 210 12.0 0.0 9100 11.8 0.3 300 11.8 0.3 320 320 320 320	1200	6.6	1.9	300	10.6	0.1	9200	10.3	0.2	9200
11.4 0.5 210 12.0 0.0 11.8 0.3 300 320 12.0 0.2* 320	1440	12.0	1.0	200	12.0	1.0	0006	11.5	0.0	0006
11.8 0.3 12.0 0.2*	1500	11.4	0.5	210	12.0	0.0	9100			
12.0 0.2*	1680	11.8	0.3	300						
	1710	12.0	0.2*	320						

* Interpreted end of test at vapor monitoring point.




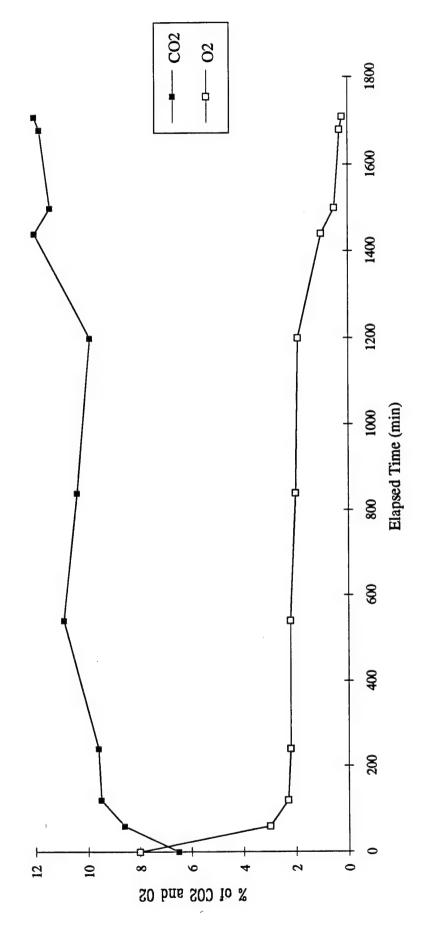

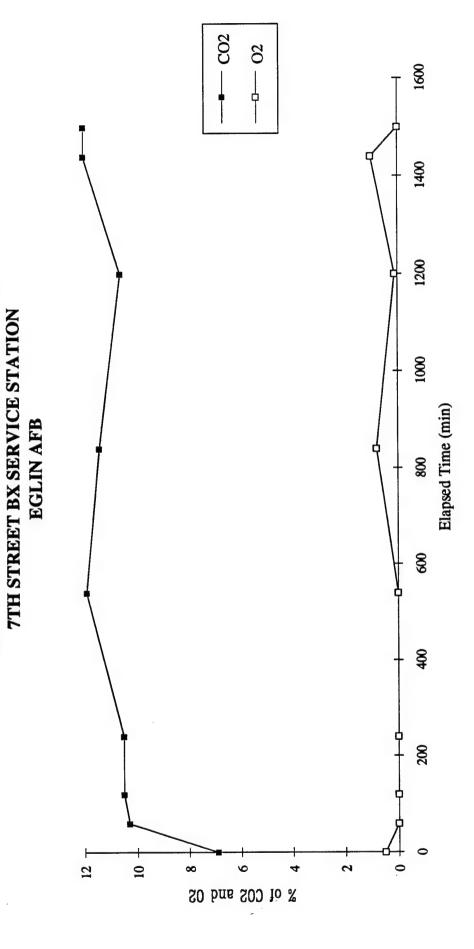


RESPIRATION TEST RESULTS AT VMP-2S




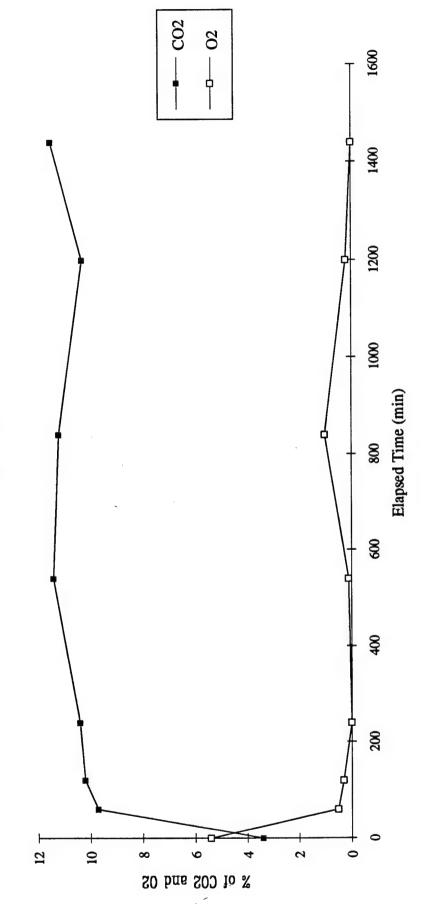




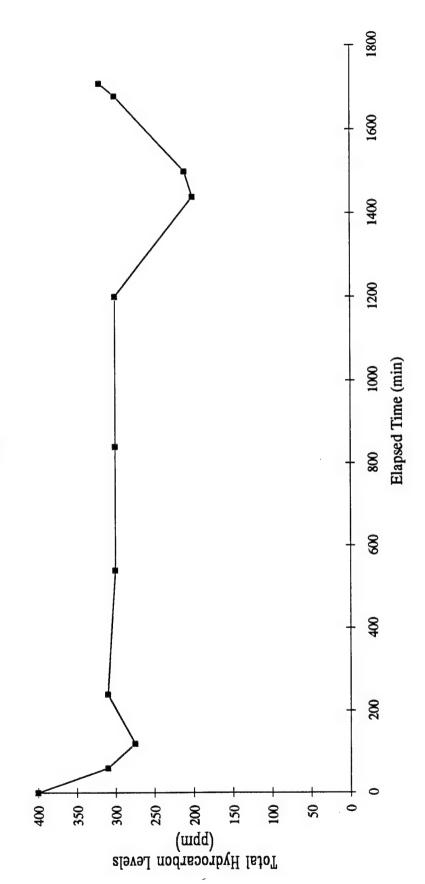

RESPIRATION TEST RESULTS AT VMP-2D 7TH STREET BX SERVICE STATION EGLIN AFB

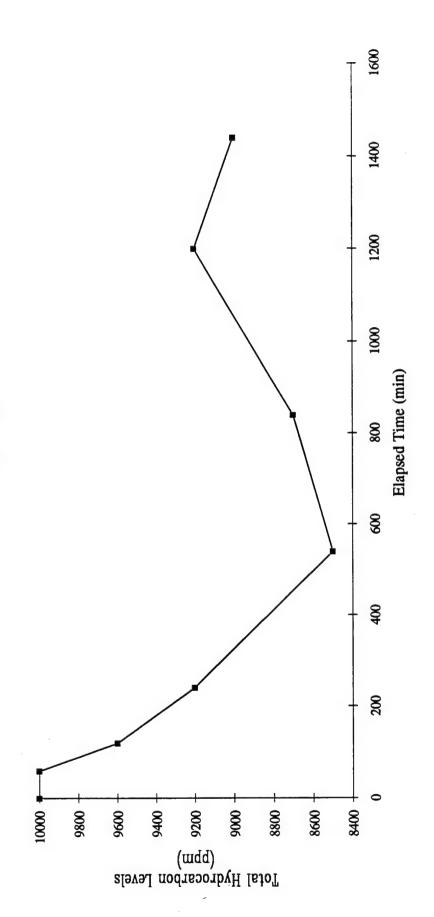

RESPIRATION TEST RESULTS AT VMP-2S 7TH STREET BX SERVICE STATION EGLIN AFB

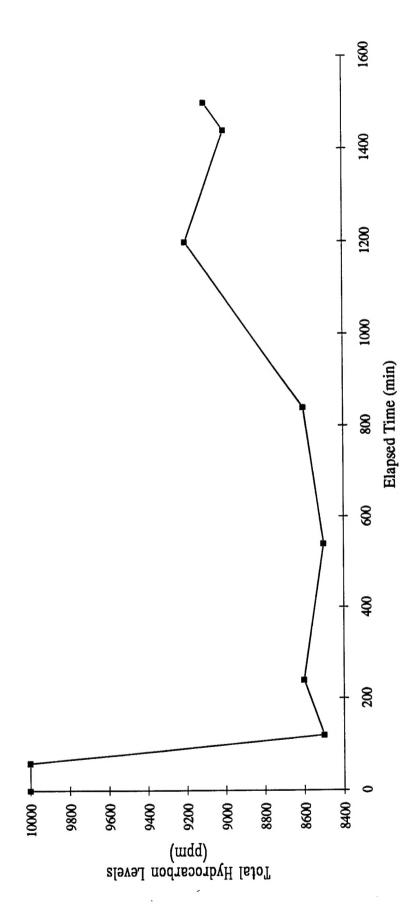

Page: 65 January 28, 1992

1MP (1 POC DAT

MP-1D	CO ₂ METER NO. <u>6.0258</u>	D7038	2 TIME 1330		Total	O2% Hydrocarbon mainin							-					
G POINTS	NO. LO 258	ETER NO.	SHILT DOWN DATE 09-02-92 TIME	Thurst The second		Time CO ₂ % O											·	
MONITORING POINTS	O ₂ METER NO.		1	1		Comments		Shut-down	(Mr)	(pm)	(mg)	(PM)	Merning (AM)	AM)	(PM)	(MQ)	(pm)	
STATIO	2	1 Neob	CTAES.	200		Helium		1	1	1	1	1	1	J	1	ı	1	
1774 STREET BX SERVICE STATION	2, 1992	YIMO DOINT	47 de C.	24 4 60	Total	Hydrocarbon	390	400	3/6	27%	3/6	300	300	300	200	210	300	
r Bx	YBER	Marik	A	N N N N N N N N N N N N N N N N N N N		٥,×	0.8≈	8.0	3.0	7.7	0.0	2.2					6.0	,
STREE	September	1/2000	2	5		CO2%	6.5	6.5	8.6	9.5	9.6	10.9	4.0/	6.6	12.0	11.4	8.//	:
SITE 77.4	DATE	2	O'S AMONIA PER	SAMPLER(S)	Dote	Time	03/02/92 13.10	1330	1438	1	1		29/20/92	0939	1339	1439		

End of Test

١

320

0.7

12.0

1800

Figure 8-1. Typical Record Sheet for In Situ Respiration Test.

Page: 65 January 28, 1992

40258 CO2 METER NO. D 7038 VMP2S 8507 DATE SEPTEMBER 2, 1992 O, METER NO. LO25 LOCATION VALOR MATER NO. MONITORING POINTS_ SITE THE SPREET BX SERVICE STATION

SAMPLERIS) OLA AWOSIKA & ED STAES	00	AMOSI	KA & ED	STAE	1 1	SHUT DOWN DATE 09-02-92	09-02		TIME	1330	
Date/ Time	×603	×,0	Total Hydrocarbon	Hellen	Commente	Date	* ² 00	* ^t o	Total Hydrocarbon	Hellum	Comments
26/20/60		1									
1330	6.9	6.5	2/0.000	ı	shut down						
1	2.07	0.0	710,000	1	(Pm)						
1535	10.5	0.0	8,500	1	(PM)						
	0.0 5.0/		8,600	ı	(pm)						
2235	6.11	0.0	8.500	1	(Md)						
49/20/60	7.11	0.8	8,600	1	(AM)						
1	9.01	1	9,200	ı	(my)						
	0.7 9.8	7.0	9.000	1	(ma)						
	0.6/	0.0	9.100	1	End of Test						
								, 			
						•					
	-	1		1000							

Figure 8-1. Typical Record Sheet for In Situ Respiration Test.

Page: 65 January 28, 1992

85007 1330 CO2 METER NO._ 27038 VMP-2D TIME SHUT DOWN DATE 09-02-92 40 258 HYDROCARBON METER NO._ MONITORING POINTS O₂ METER NO. Deep SITE THE STREET BX SERVICE STATION SAMPLEH(S) OLA AWOSIKA & ED STAES LOCATION Vator Montering Pant 2 September 2, 1992 DATE

Data/ Time	* ² 00	ە. %	Total	Helium	Comments	Dote/ Time	* ¹ 00	% ² 0	Total Hydrocarbon	Helium	Comments
1300	3.5		5.5 > 10,000	١							
1336	4:8	5.4	3:4 5.4 >10,000	1	Shutdown						
1430	4.7	6.0	0.5 ×0,000	1	(PM)						
1530	610.2 0.3	6.9	9,600	١	. (md)						
	40.4	0.0	9,200	ı	(Md)						
2230	11.4	0.1	8.500	1	(PM)						
04/3/42	7.77		8.700	1	(****)						
0930 10.3 0.2	10.3	0.2	9,200	١	(w k y)						
1330	11.5 0.0	0.0	9,000	1	End of Test						
		•									